

# T1/E1/CEPT/ISDN-PRI TRANSFORMERS


## Features:

- Dual Surface Mount, 1500Vrms, Small Package
- Dual SMT package contains both transmit and receive transformers
- Models matched to leading transceiver ICs
- Operating temperature 0°C to 70°C


## Electrical Specifications @ 25°C

Part Number	Turns-Ratio (Pri:Sec ±5%)	OCL (mH Min)	Cw/w (pf Max)	Li (uH Max)	DCR Pri (Ω Max)	Primary Pin
YL26-1065S	1CT:1.15CT & 1CT:2CT	1.20 & 1.20	30 & 30	0.6 & 0.6	0.7 & 0.7	16-14; 6-8

## Schematics



## Mechanical

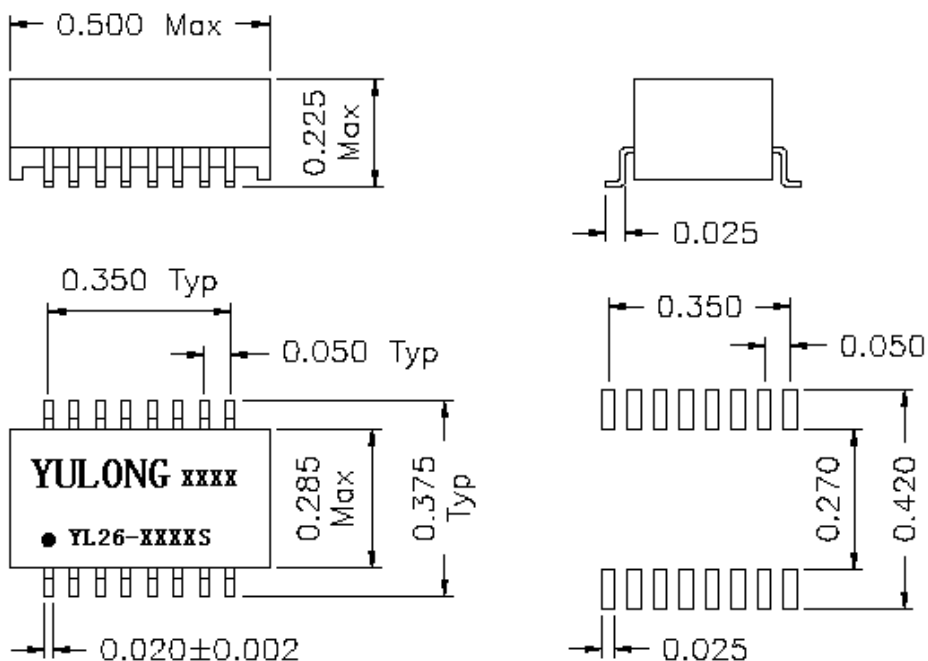

**NOTE: Dimensions: inches unless otherwise specified all tolerances are ±0.010**